


# UN 86 SERIES TEMPERATURE-RESISTANT GAS SAMPLING PUMPS

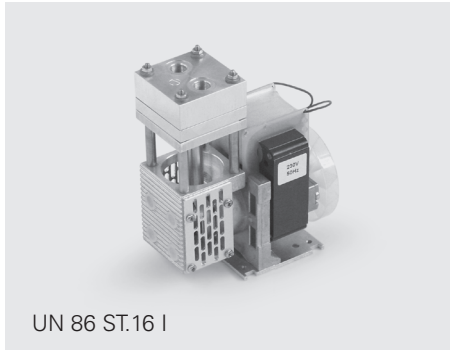


UN 86 ST.16 I

## ADVANTAGES

- The temperature-resistant pump head is ideal for transferring hot process gases of up to 240 °C / 460 °F
- High chemical resistance
- Compact size
- Lightweight
- Power efficient

## POSSIBLE AREAS OF USE

- Environmental monitoring – especially motor test benches in automobile industry
- Analytical technology
- Research



Please visit our website  
[www.knf.com](http://www.knf.com)  
to get more information

### PERFORMANCE DATA

Series model	UN 86	
Material design	AT.16 I	ST.16 I
Pump head	Aluminum	316 Stainless steel
Diaphragm	PTFE	
Valves	PTFE	
Flow rate at atm. pressure (l/min)	6.0	
Ultimate vacuum (mbar abs./inHg)	290/21.3	
Max. operating pressure (bar g./psig)	1.5/21.8	
Permissible ambient temperature (°C/ °F)	5° C to 40° C / 40° F to 105° F	
Permissible media temperature (°C/ °F)	5° C to 240° C / 40° F to 460° F	
Weight (kg/lbs)	1.3/2.9	1.5/3.3

### ELECTRICAL DATA

Voltage (V)	115
Motor	Shaded pole motor
Motor protection class	IP 00
Frequency (Hz)	60
Power P <sub>1</sub> (W)	140
I <sub>max</sub> (A)	1.21


# UN 86 AT.16 I | UN 86 ST.16 I

## PERFORMANCE DATA


Series model	Flow rate at atm. pressure (l/min) <sup>1)</sup>	Max. operating pressure (bar g./psig)	Ultimate vacuum (mbar abs./inHg)
UN 86 AT.16 I	6.0	1.5/21.8	290/21.3
UN 86 ST.16 I	6.0	1.5/21.8	290/21.3

<sup>1)</sup> Flow rate determined at 20°C/68°F, 1013 mbar abs.

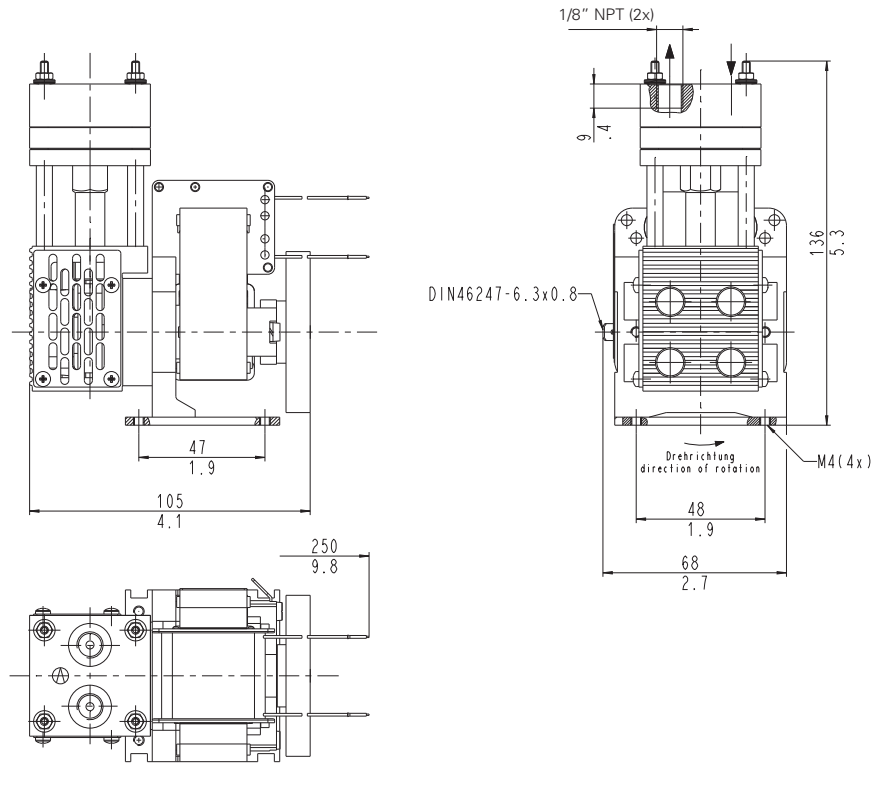


## UN 86 AT.16 I | UN 86 ST.16 I

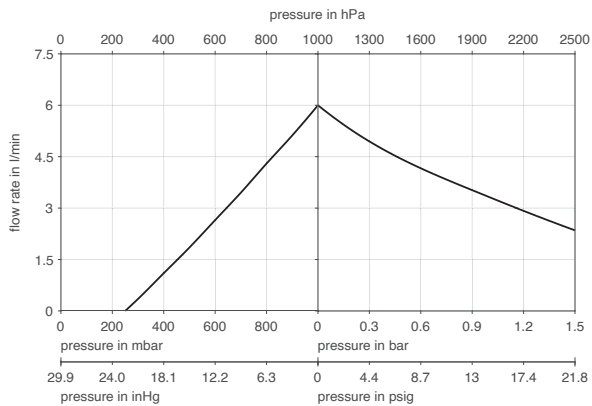


## UN 86 \_T.16 I



## OPTIONS

Description	Illustration	Details
Rotated pump housing		The pump housing may be rotated by 180° at the factory. Any condensate will drain from the pump head, which improves the function of the pump when operating with high condensate concentrations.
Customized head connectors		The height of the remote pump head can be adapted to the customer's system according to the project. NPT1/8" threaded connections and various fittings are optional.
Flanged version		This configuration has been designed for installation on a heated analyzer cabinet. The pump is mounted by a flange on the outside of the cabinet housing. The pump head then protrudes into the hot area. The area between the pump head and the compressor housing can be insulated.
Brushless DC motor		Controllable, brushless DC motors are available as an option. They can be used for the dynamic adjustment of pumping capacity to the customer's system and for the custom-fit calibration of the pumping capacity.
Heated variant (.11)		The pump head is pre-heated to ca. 240 °C using a heating cartridge and a thermostat.

## ACCESSORIES

Description	Illustration	Part No.
Wrench for retainer plate		018812
Holding tool		055662

## SPARE PARTS

Description	Illustration	Part No.	Details
Spare parts kit N 86 AT/ST.16		201598	Spare parts kit consists of: 1x diaphragm (2-fold), 1x valve plate, 1x O-ring. This set is required to maintain the pump.

The performance values for the series models shown on this data sheet were determined under test conditions. The actual performance values may differ and depend in particular on the usage conditions and therefore on the specific application, on the parameters of the components involved in the user's system and on any technical modifications carried out which deviate from the standard configuration or the as delivered condition.

If individual designs have been created for specific customers on the basis of series models, other technical performance data may apply. Before operation begins, the relevant operating instructions and/or assembly or installation instructions should be read and the safety information contained in these instructions should be noted. KNF reserves the right to make changes to the product and the associated documentation without prior notice to the customer.



[www.knf.com](http://www.knf.com)