



Voltage	Frequency	Input power	Current	Capacitor	Airflow	Speed rotation	Noise level	Rotation direction	Operating temperature	ErP 2013	ErP 2015
V	Hz	Wa	A	μF	m³/h	RPM	dBA		Min / Max		
230	50	244	1,07	6,0	620	2 014	68	R	-20°C / +70°C	OK	NOK
230	60	264	1,16	5,0	540	1 775	65	R	-20°C / +70°C		
230	50				364 CFM				-4°F / +158°F		
230	50				317 CFM				-4°F / +158°F		

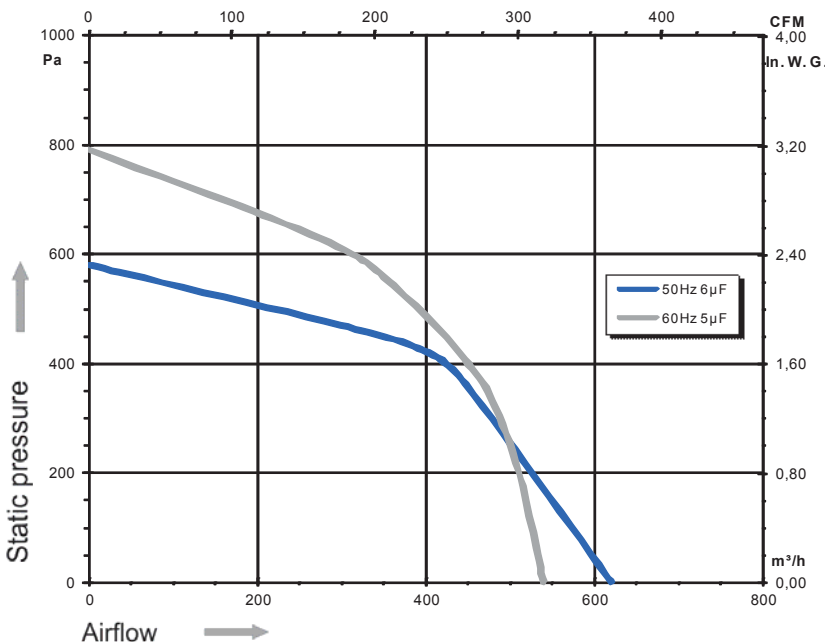

dBa : free let out

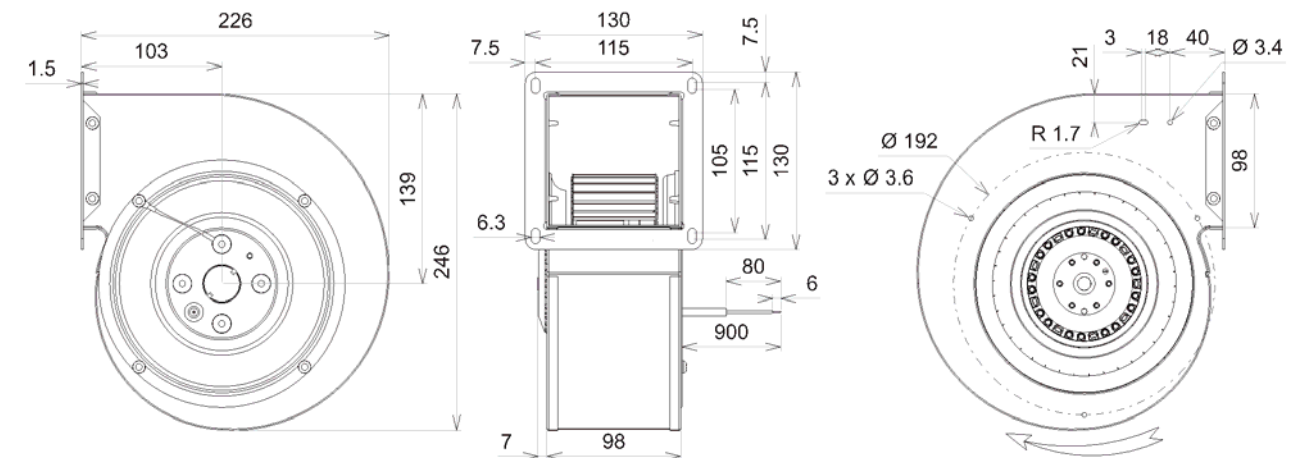

Capacitor for 50Hz	Capacitor for 60Hz	Finger guard
19016	19131	21291

- Weight : 4,1 Kg

- Ball bearing
- Class F, thermally protected
- IP44 protection depending on installation and position as per EN60034-5
- G2.5 balancing
- Galvanized steel impeller
- Rotor : black paint
- Scroll housing : black paint

