

**Code:**

9RD NN CC

|     |                       |
|-----|-----------------------|
| 9RD | Flow Divider Typology |
| NN  | Number of elements    |
| CC  | Displacement Code     |

**Example:** Flow divider with two elements (same displacement):  
RV-2D / 11 x 2

9RD 02 47

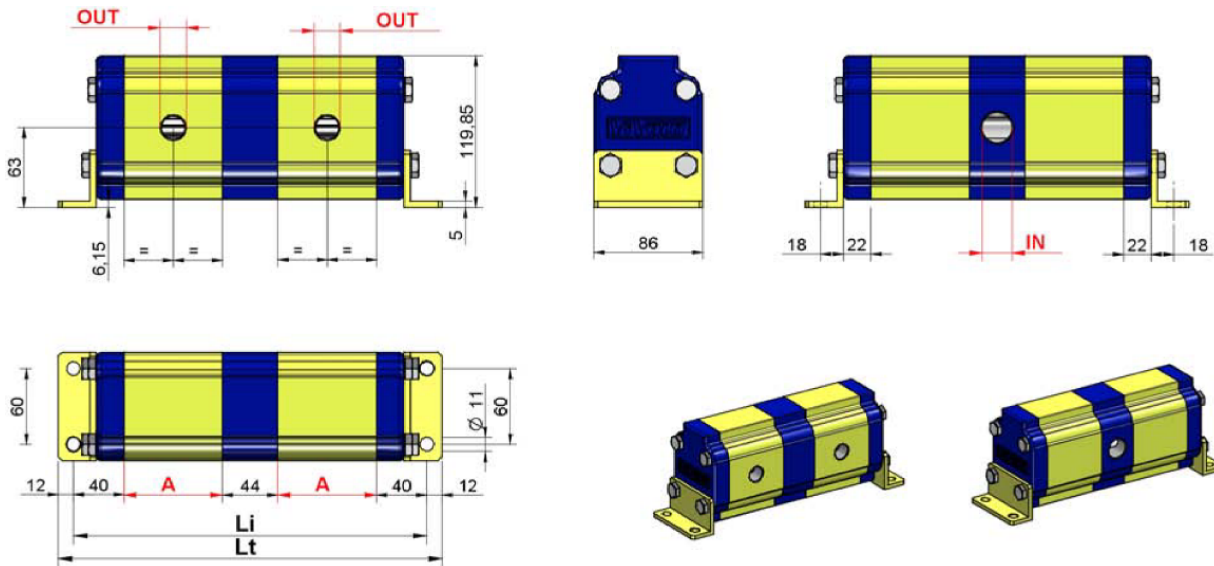
**Example:** Flow Divider with 4 elements with different displacement (max 7):  
RV-2D / 9+14+14+22

9RD 04 45 49 49 55

**NOTE:** to define codes for flow dividers with more than 7 different displacement, please contact our sales department.

**Table: 1**

| Displacem.<br>Cm <sup>3</sup> /rev | CC<br>Code | Max<br>Pressure<br>bar | One element flow rate<br>l/min |             |      |
|------------------------------------|------------|------------------------|--------------------------------|-------------|------|
|                                    |            |                        | MIN                            | RECOMMENDED | MAX  |
| 4                                  | 41         | 210                    | 4,8                            | 7,6         | 10   |
| 6                                  | 43         | 210                    | 7,2                            | 10,8        | 15   |
| 9                                  | 45         | 210                    | 10,8                           | 15,1        | 22,5 |
| 11                                 | 47         | 210                    | 13,2                           | 19,4        | 27,5 |
| 14                                 | 49         | 200                    | 16,8                           | 25,9        | 35   |
| 17                                 | 51         | 200                    | 20,4                           | 30,2        | 42,5 |
| 19                                 | 53         | 190                    | 22,8                           | 34,6        | 47,5 |
| 22                                 | 55         | 180                    | 26,4                           | 41          | 55   |
| 26                                 | 57         | 160                    | 31,2                           | 45,4        | 65   |
| 30                                 | 59         | 160                    | 36                             | 54          | 75   |
| 34                                 | 61         | 140                    | 40,8                           | 61,6        | 85   |
| 40                                 | 63         | 130                    | 48                             | 71,3        | 100  |



REFERENCES: RD201

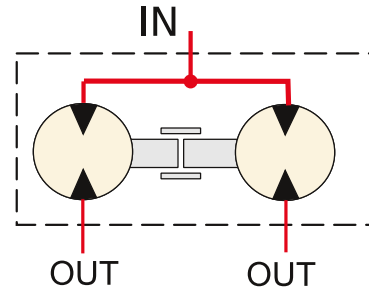
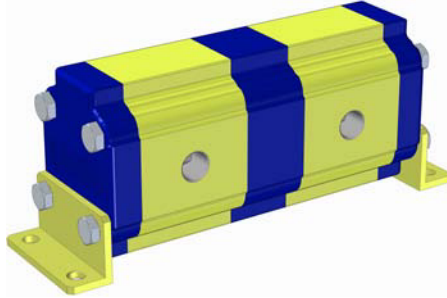
**Table: 2**

Li = Distance between fixing hole centres (single displacement flow divider)

| Cm³/rev | A   | IN      | OUT     | Number of elements |     |     |     |     |      |      |      |      |      |      |      |      |      |      |  |
|---------|-----|---------|---------|--------------------|-----|-----|-----|-----|------|------|------|------|------|------|------|------|------|------|--|
|         |     |         |         | 2                  | 3   | 4   | 5   | 6   | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 15   | 16   |  |
| 4       | 47  | 3/4 BSP | 1/2 BSP | 218                | 309 | 400 | 491 | 582 | 673  | 764  | 855  | 946  | 1037 | 1128 | 1219 | 1310 | 1401 | 1492 |  |
| 6       | 50  | 3/4 BSP | 1/2 BSP | 224                | 318 | 412 | 506 | 600 | 694  | 788  | 882  | 976  | 1070 | 1164 | 1258 | 1352 | 1446 | 1540 |  |
| 9       | 54  | 3/4 BSP | 1/2 BSP | 232                | 330 | 428 | 526 | 624 | 722  | 820  | 918  | 1016 | 1114 | 1212 | 1310 | 1408 | 1506 | 1604 |  |
| 11      | 58  | 3/4 BSP | 1/2 BSP | 240                | 342 | 444 | 546 | 648 | 750  | 852  | 954  | 1056 | 1158 | 1260 | 1362 | 1464 | 1566 | 1668 |  |
| 14      | 64  | 3/4 BSP | 1/2 BSP | 252                | 360 | 468 | 576 | 684 | 792  | 900  | 1008 | 1116 | 1224 | 1332 | 1440 | 1548 | 1656 | 1764 |  |
| 17      | 68  | 3/4 BSP | 1/2 BSP | 260                | 372 | 484 | 596 | 708 | 820  | 932  | 1044 | 1156 | 1268 | 1380 | 1492 | 1604 | 1716 | 1828 |  |
| 19      | 72  | 3/4 BSP | 1/2 BSP | 268                | 384 | 500 | 616 | 732 | 848  | 964  | 1080 | 1196 | 1312 | 1428 | 1544 | 1660 | 1776 | 1892 |  |
| 22      | 78  | 3/4 BSP | 1/2 BSP | 280                | 402 | 524 | 646 | 768 | 890  | 1012 | 1134 | 1256 | 1378 | 1500 | 1622 | 1744 | 1866 | 1988 |  |
| 26      | 82  | 1 BSP   | 3/4 BSP | 288                | 414 | 540 | 666 | 792 | 918  | 1044 | 1170 | 1296 | 1422 | 1548 | 1674 | 1800 | 1926 | 2052 |  |
| 30      | 90  | 1 BSP   | 3/4 BSP | 304                | 438 | 572 | 706 | 840 | 974  | 1108 | 1242 | 1376 | 1510 | 1644 | 1778 | 1912 | 2046 | 2180 |  |
| 34      | 97  | 1 BSP   | 3/4 BSP | 318                | 459 | 600 | 741 | 882 | 1023 | 1164 | 1305 | 1446 | 1587 | 1728 | 1869 | 2010 | 2151 | 2292 |  |
| 40      | 106 | 1 BSP   | 3/4 BSP | 336                | 486 | 636 | 786 | 936 | 1086 | 1236 | 1386 | 1536 | 1686 | 1836 | 1986 | 2136 | 2286 | 2436 |  |

**Table: 3** in this table the number of inlets in function of the number of elements are indicated.

| Number of elements    | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|-----------------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|
| "IN" Number of inlets | 1 | 1 | 2 | 2 | 3 | 3 | 4 | 4 | 5  | 5  | 6  | 6  | 7  | 7  | 8  |

**INTERNAL DRAIN**


In **table 1** the functioning range of single flow divider elements is indicated.

The higher is the feeding capacity (  $q$  ), the higher is the precision of flow division, but in opposition there are losses of loading and higher noise. Therefore we suggest to feed the elements with capacities equal or a few superior to the ones indicated in the column "**RECOMMENDED**".

It's important remember to verify the capacities even in phase of flow reunion.

The pressures indicated are to be considered as maximum of functioning, the flow divider is able to bear peaks of pressure 20% superior.

**How to calculate the "Li" and "Lt" measures of flow dividers:**

From **table 2** it is possible to obtain the "Li" measure for flow dividers up to 16 elements with equal displacements; for flow dividers with different elements or with more than 16 elements the "Li" and "Lt" measure have to be calculated by the following formula:

$$Li = [(n-1) \times 44] + 80 + (A1 + A2 + A3 + \dots)$$

$$80 = 40 + 40$$

$n$  = Number of elements of flow divider

$A1 \dots An$  = heights of elements of flow divider

$$Lt = Li + 24$$

$$24 = 12 + 12$$

**EXAMPLE:** To obtain the measures **Li** and **Lt** of a flow divider with three elements ( $n=3$ ), **RV-2D 19 + 11 + 9**

Distance between fixing hole centres

$$Li = [(3-1) \times 44] + 80 + 72 + 58 + 54 = 352 \text{ mm}$$

Total Length

$$Lt = 352 + 24 = 376 \text{ mm}$$

In **table 3** the number of inlets in function of the number of elements are indicated.

For flow dividers with many inlets, as they are all communicating it is even possible to use only one of them, by plugging the other ones. We suggest to use at least one **3/4" BSP** inlet every **80 l/min** capacity and at least one **1" BSP** inlet every **120 l/min** capacity

To obtain errors of division inferior to 3% there must be no difference of pressure between the elements superior to 30 bar. To obtain high precisions the respect of the following parametres is also important:

- Environment temperature:  $-10^{\circ}\text{C} \div +60^{\circ}\text{C}$       Oil temperature:  $+30^{\circ}\text{C} \div +60^{\circ}\text{C}$
- Hydraulic oil based on hlp, hv (din 51524) minerals      Oil Viscosity  $20 \div 40 \text{ cSt}$
- Oil filtering  $10 \div 25 \mu$